



## A REVIEW REPORT FOR HEAT TRANSFER AND FLUID FLOW CHARACTERISTICS

**Dr. Ashwini Kumar\***

\* Professor (Asst.), Department of Mechanical Engineering, Parikrama College of Engineering, Ahmednagar-414701, Maharashtra, India

**DOI: 10.5281/zenodo.1034495**

**KEYWORDS:** Relative roughness pitch, ( $p/e$ ); Relative roughness height, ( $e/D$ ); Flow Reynolds number, ( $Re$ ); Nusselt number, ( $Nu_{3r}$ ); Collector roughness and flow parameters; Collector performance parameters; Collector thermal efficiency, ( $\eta_{th}$ ); Thermo hydraulic efficiency, ( $\eta_{thermo}$ ).

### NOMENCLATURE

B Solar air heater duct height, m

$B^{-1}$  Stanton number roughness parameter;  $B^{-1} = G_H - P_r R_M$

$C^{-1}$  Efficiency roughness parameter;  $C^{-1} = 2.5 \ln e^+ + 5.5 - R_M$

D Hydraulic diameter of solar air heater duct, m Mass Flow Rate

e Roughness height, m

$e/D$  Relative roughness height

$e^+$  Roughness Reynolds number  $= e/D \sqrt{\left(\frac{f_r}{2}\right)} Re$

$e_{opt}^+$  Optimal value of  $e^+$

f Friction factor

$G_H$  Heat transfer roughness function;  $G_H = 4.5(e^+)^{0.28} p_r^{0.57}$

$L^{-1}$  Efficiency parameter;  $L^{-1} = C^{-1} - B^{-1}$

P Pitch of roughness element, m

$p/e$  Relative roughness pitch

$P_r$  Prandtl number

$P_{rt}$  Turbulent prandtl number

$f_r$  Friction factor in roughened collector

$\bar{f}_r$  Average friction factor

Re Reynolds number

$R_M$  Momentum transfer roughness function;  $R_M = 0.95(p/e)^{0.53}$

$f_s$  Friction factor in smooth collector

$S_t$  Stanton number

$\bar{S}_t$  Average stanton number

$\bar{S}_{tr}$  Average stanton number

W Width of solar air heater

u Velocity, m/s

$u^+$  Dimensionless velocity;  $u/\sqrt{\tau_0/\rho}$

y Distance from the wall, m

$y^+$  Dimensionless distance;  $(y/\nu)\sqrt{\tau_0/\rho}$



$\delta'$  Transition sub-layer thickness, m

$\delta''$  Laminar sub-layer thickness, m

### ABSTRACT

Solar air heaters are one of the simplest and cost effective solar energy utilization systems for various drying applications. The thermal efficiency of solar air heaters is found to be low due to low heat transfer coefficient on the air side. Attempts have been made to enhance the heat transfer rate from the absorber plate to air by using different roughness elements. Enhancement of heat transfer coefficient is achieved by providing artificial roughness, always goes with an increment of pressure drop and more pumping power is required. So, there is a need to optimize the system parameters to maximize heat transfer, while keeping the friction losses as low as possible. In the present paper the effect of artificial roughness of various geometries and glass cover on the performance of solar air heaters, investigated and analyzed by different investigators, has been mentioned. Also the results due these roughness and glass covers have been illustrated.

---

### INTRODUCTION

Since the beginning of time, people have been fascinated by the power of sun. Ancient civilizations personified the sun, worshipping as a God. Throughout history, farming and agriculture efforts have relied upon the sun's rays to grow crops and sustain population. However, we have developed the ability to harness the sun's awesome power. The resulting technologies have promising implications for the future of renewable energy and sustainability. A solar thermal collector collects heat by absorbing sunlight. A collector is a device for capturing solar radiation. Solar radiation is energy in the form of electromagnetic radiation from the infrared (long) to the ultraviolet (short) wavelengths. The quantity of solar energy striking the earth's surface (solar constant) averages about 1000 watts per square meter under clear skies, depending upon weather conditions, location and orientation. The term 'solar collector' commonly refers to solar hot water panels, but may refer to installations such as solar parabolic troughs and solar or basic installations such as solar air heaters. Concentrated solar power plants usually use the more complex collectors to generate electricity by heating a fluid to drive a turbine connected to an electrical generator. Simple collectors are typically used in residential and commercial buildings for space heating. Solar collectors are either non-concentrating or concentrating. In the non-concentrating type, the collector area (i.e., the area that intercepts the solar radiation) is the same as the absorber area (i.e., the area absorbing the radiation). In these types the whole solar panel absorbs light. Concentrating collectors have a bigger interceptor than absorber. Solar air heating is a solar thermal technology in which the energy from the sun is captured by an absorber and used to heat air flowing over it. Solar air heating is a renewable energy heating technology used to heat or condition air for buildings or process heat applications. It is typically the most cost-effective out of all the solar technologies.

Solar air heaters are a system that collect solar energy and transfers the heat to passing air, which is either stored or used for space heating. The collectors are often black to absorb more of the sun's energy and a conductive material, often metal, acts as a heat exchanger. Solar air heaters can compliment traditional indoor heating systems by providing a free and clean source of heat. Solar energy is very vast inexhaustible resource of energy. The power from the sun intercepted by the earth is approximately  $1.8 \times 10^{11}$  MW, which is many thousands times larger than the present consumption rate on the earth of all commercial energy sources. Thus, solar energy would supply all the present and future need of the world consistently. This makes it one of the promising conventional energy sources. Scientists, engineers & power producing concerns all over the world, are trying to tap this resource. In addition it is environmentally pollution free & available in adequate quantity in almost all parts of the world. However, there are many problems associated with its use. The major drawback with this resource is its low density. Even in the hotter region on the earth, the solar radiation flux available rarely exceeds 1 KW/m<sup>2</sup> and the total radiation over a day is about 7 KW/m<sup>2</sup>. This inherent drawback requires large collection area and low efficiency. Large collection area results in excessive cost. However, a number of investigators have given their contributions for better performance of solar air heaters.

### EFFECT OF COLLECTOR PARAMETERS

Number of cover plates:



## Global Journal of Engineering Science and Research Management

Larger the number of cover plates reduces the thermal losses by leading to a fall in the effective transmissivity in low temperature region. At high temperature three plate covers is superior to one. Thus the number of cover plates depends upon the desired output and hence absorber temperature. The effect of the number of glasses on the solar collector efficiency has been shown in Fig. 1.1.

### **Glass covers emissivity:**

Low values of emissivity result in low thermal losses and thus better efficiency. Fig. 1.2 shows the influence of glass cover emissivity upon collector efficiency.

### **Absorber plate material and geometry:**

Fig.1.3 shows the effect of the absorber plate material. Metallic absorber plates have higher efficiency as compare to that of the plastic ones due to their higher thermal conductivity. A tube type sheet absorber plates have high thermal conductivities which allow for thin sheets and lower conductivities can be compensated by thicker fins. Fig.1.4 shows the combined effect of material and sheet thickness. Fig.1.5 shows the effect of tube spacing in the absorber plate. Tube spacing has a strong effect for the case of plastic absorber plates.

### **Absorber plate selectivity:**

Selectivity is the ratio of absorptivity to emissivity. In order to reduce thermal losses from the absorber plate emissivity should be reduced and absorptivity should be as high as possible, as shown in Fig.1.6.

**EFFECT OF OPERATIONAL PARAMETERS** This group of parameters includes the fluid inlet and outlet temperatures and mass flow rate. These are subjected to planned variation to meet the requirements. Fig.1.7 shows the effect of specific mass flow rate on efficiency of the collector. Higher mass flow rates leading to higher efficiency because of reduction in heat losses as larger amount of energy is transferred from the absorber decreasing its temperature. The effect of fluid inlet temperature is shown in Fig.1.8, lower inlet temperatures yielding higher efficiencies.

### **EFFECT OF METROLOGICAL PARAMETERS**

Global irradiation, ambient temperatures and wind speed are the important meteorological parameters which influence the collector performance to a considerable extent.

### **Global irradiation:**

The effect can be seen from Fig.1.9 higher irradiations resulting in higher efficiency for the given inlet fluid temperature.

### **Ambient temperature:**

Higher ambient temperature leads to higher efficiency under similar conditions of other parameters as can be seen from Fig. 1.10.

### **Wind speed:**

Wind speed influences the convective heat transfer from the outside cover plate as can be seen from Fig. 1.11.

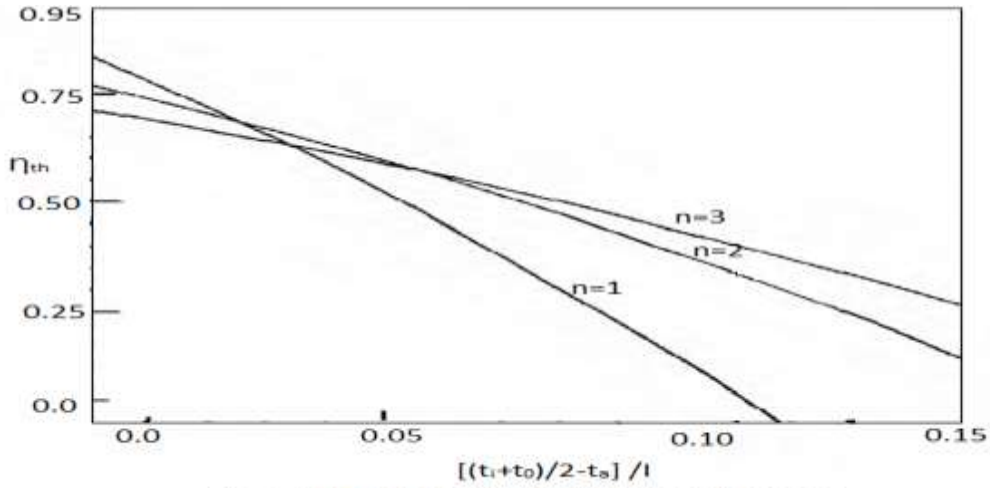


FIG. 1.1 EFFECT OF NUMBER OF COVER PLATES

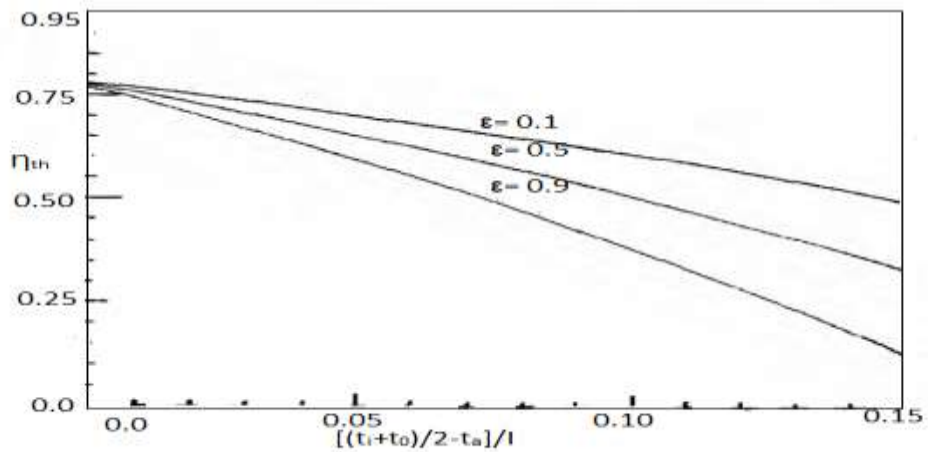


FIG.1.2 EFFECT OF GLASS EMISSIVITY

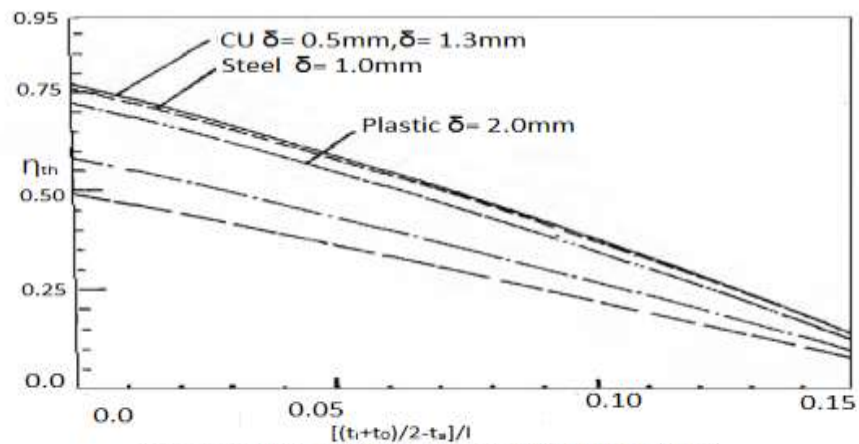


FIG.1.3 EFFECT OF MATERIAL AND THICKNESS

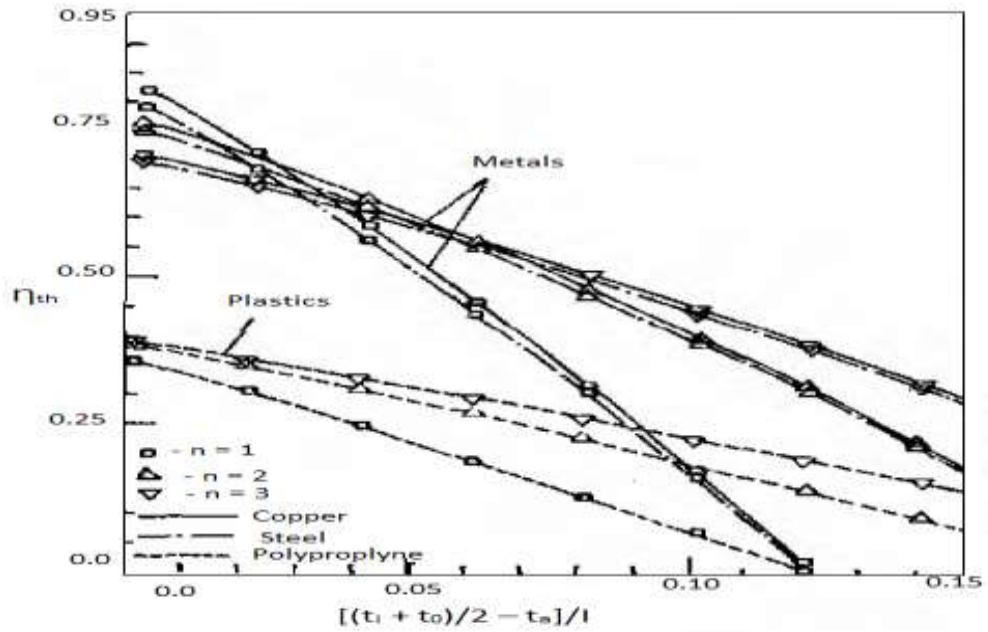


FIG. 1.4 EFFECT OF ABSORBER PLATE MATERIALS

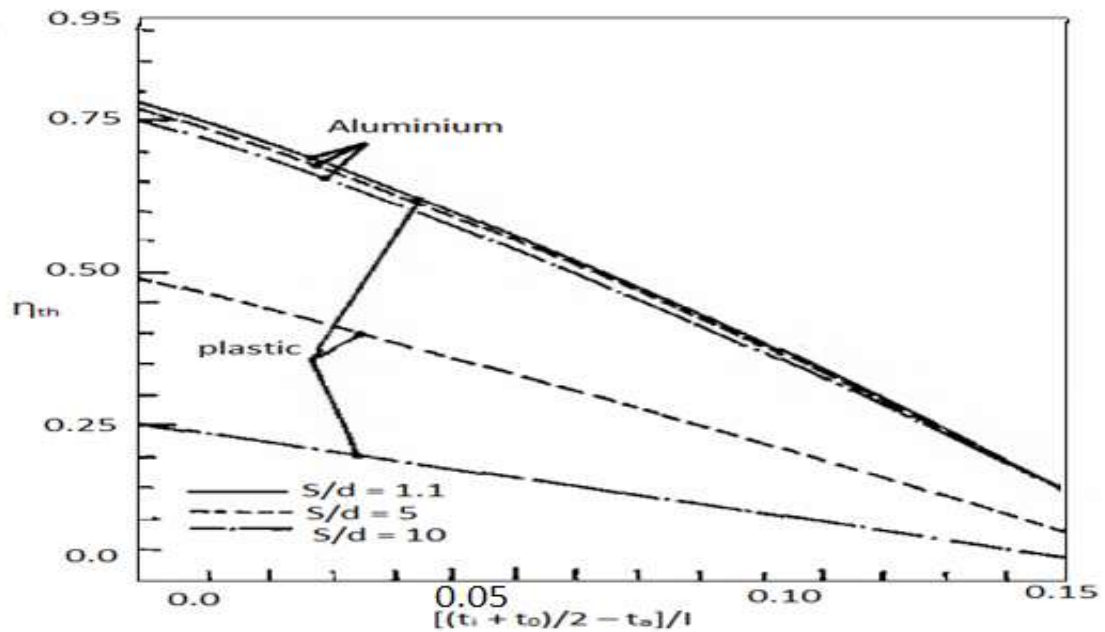


FIG. 1.5 EFFECT OF PIPE-SPACING

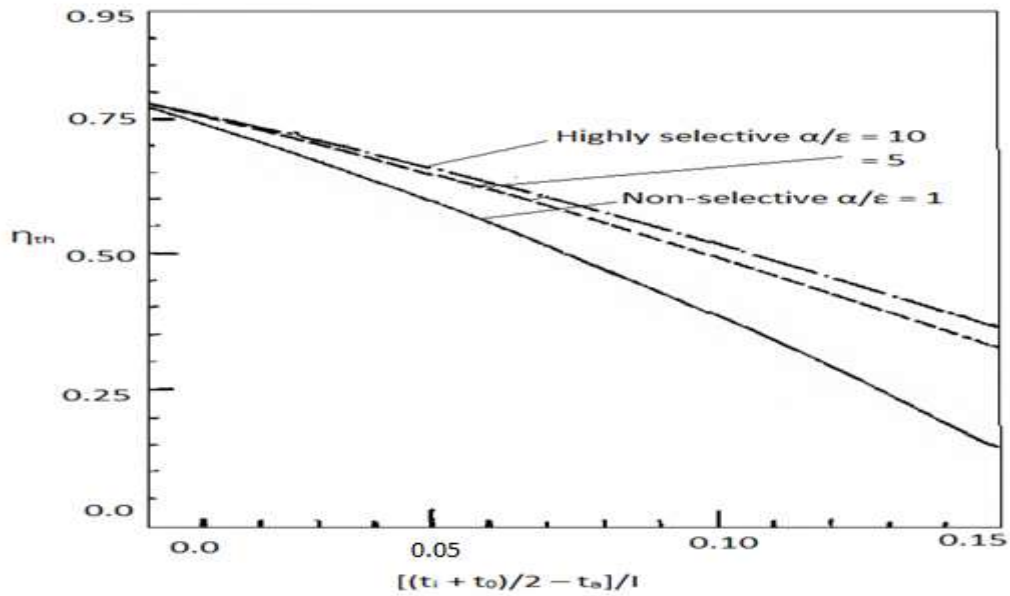


FIG. 1.6 EFFECT OF ABSORBER PLATE SELECTIVITY

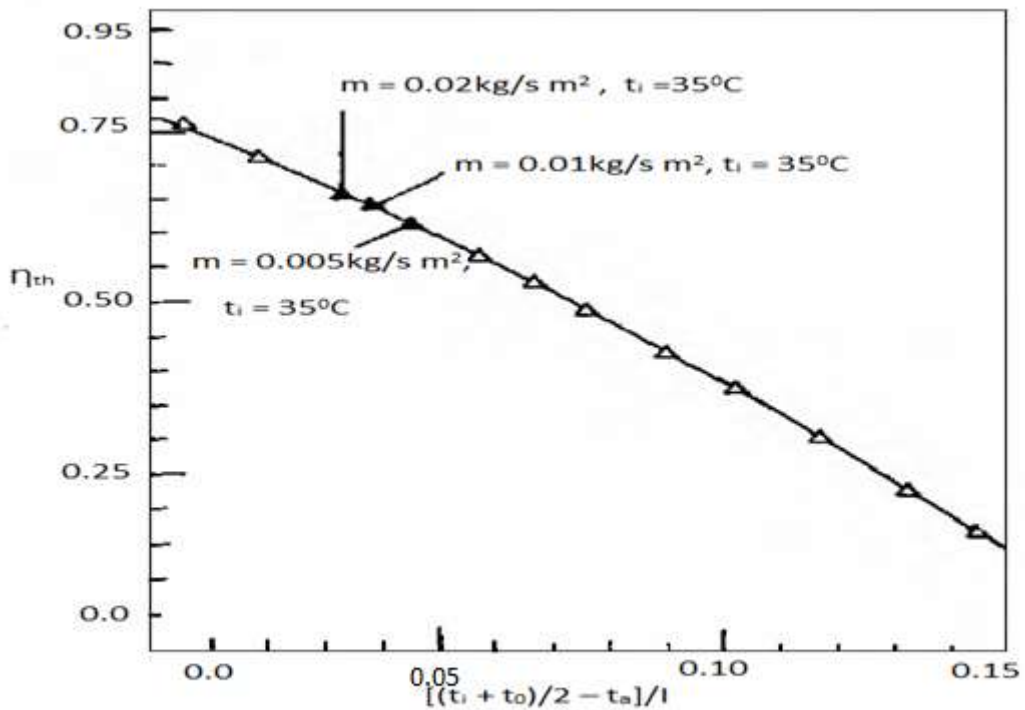


FIG. 1.7 EFFECT OF SPECIFIC MASS FLOW RATE

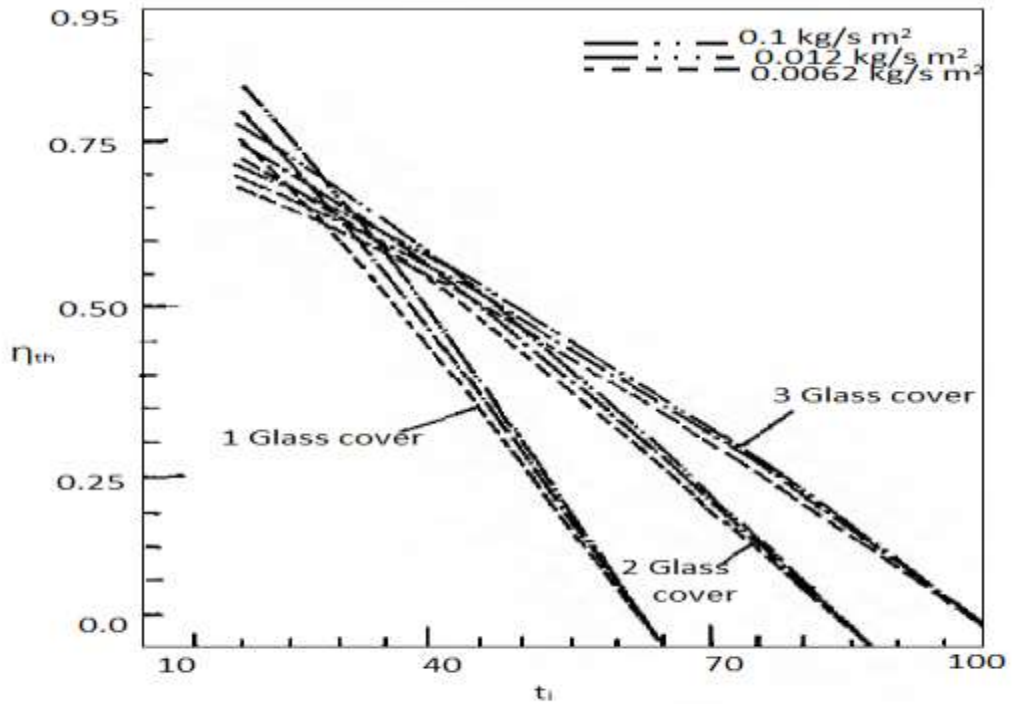


FIG. 1.8 EFFECT OF FLUID INLET TEMPERATURE AND MASS FLOW RATE

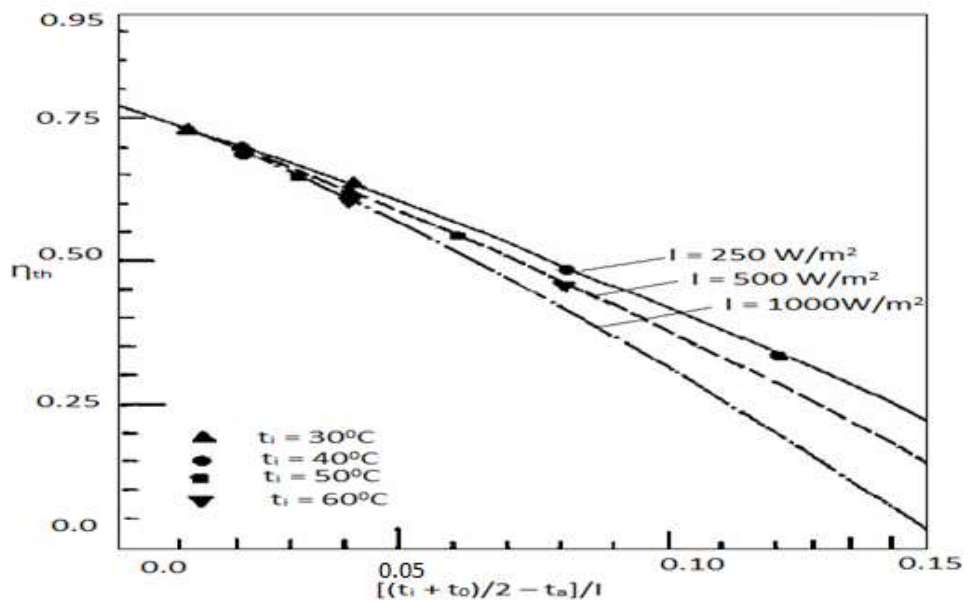


FIG. 1.9 EFFECT OF GLOBAL RADIATION

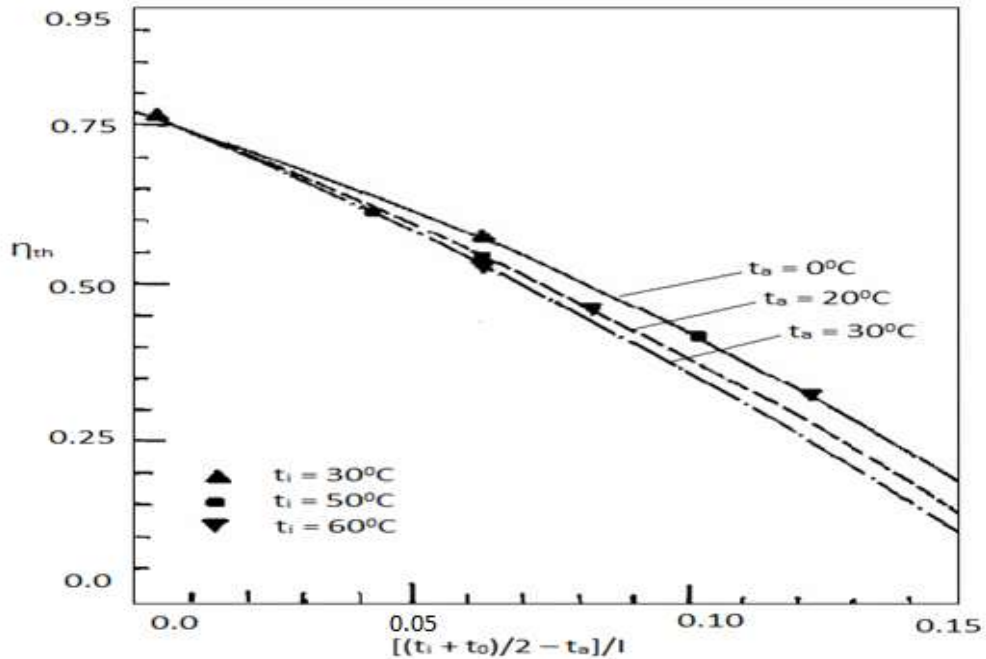


FIG.1.10 EFFECT OF AMBIENT TEMPERATUER

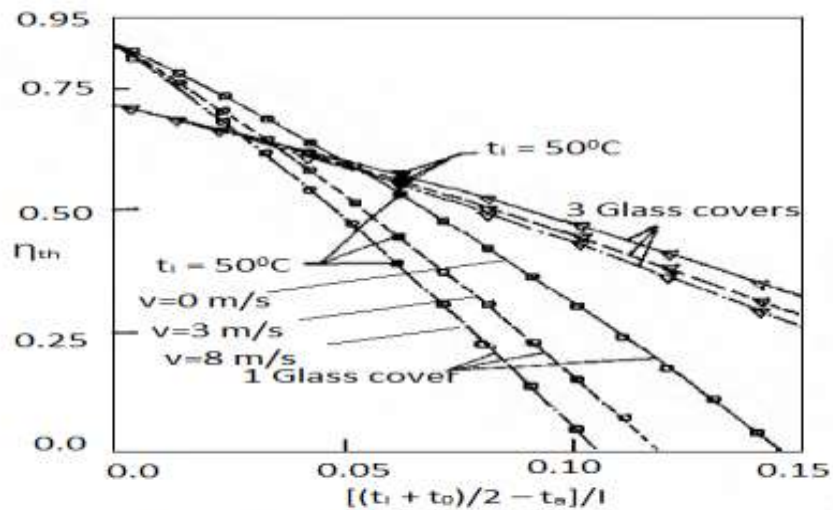


FIG.1.11 EFFECT OF WIND SPEED

**ENHANCEMENT OF INTENSITY OF INCIDENT RADIATION**

For the enhancement of intensity of incident radiation on the flat plat collectors following two methods can be taken into account:

- a) Double exposure system without booste
- b) Double exposure system with booster mirrors





## Global Journal of Engineering Science and Research Management

In a flat plate solar collector, there is a provision of only one side absorber plate and the rear portion is insulated to reduce thermal losses. If the insulated portion is replaced by a glass cover along with a booster mirrors used for the reflection of the solar radiation onto the rear side of the collector, such a system is known as double exposure collector system. Fig. 1.12 shows the arrangement of booster mirrors with a flat plate collector.

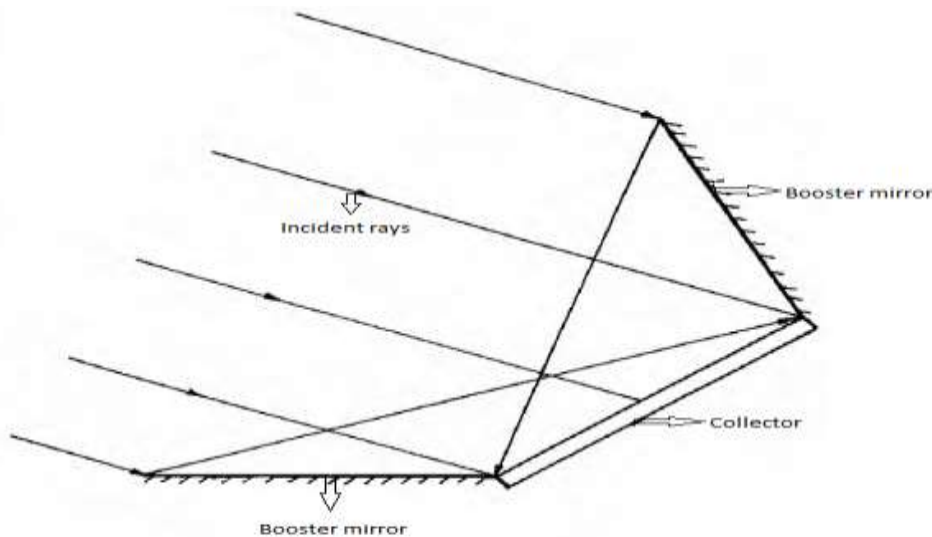


FIG. 1.12 ARRANGEMENT OF BOOSTER MIRRORS WITH A FLAT PLATE COLLECTOR

Prasad and Sah (2014), has analyzed for the enhancement in the values of radiation due to boosting on a typical hours. Fig. 1.13 shows that the intensity of radiation falling on the absorber plate increases by 40% due to boosting of radiation. The plate temperature distribution in the direction of flow duct length to see the effect of boosting of solar radiation and heat removal from the plate has been shown in Fig. 1.14. This figure also shows the effect of boosting in solar air heaters.

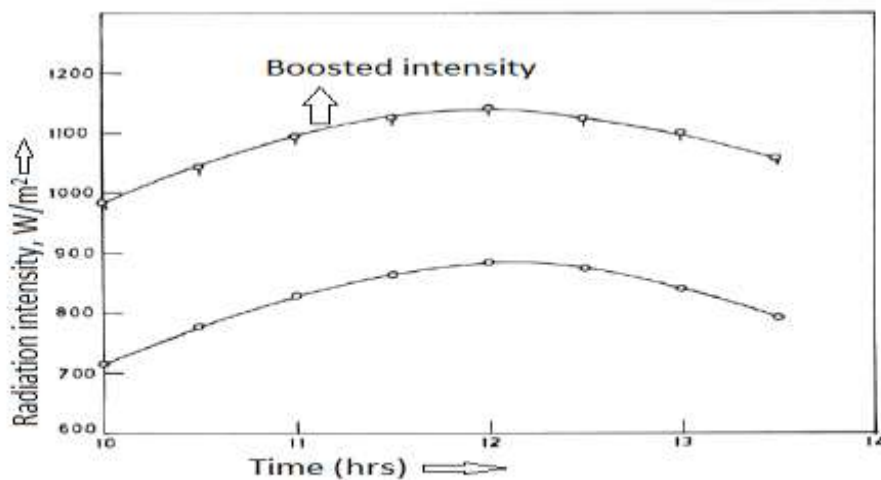


FIG. 1.13 EFFECT OF BOOSTING ON INTENSITY OF SOLAR RADIATION

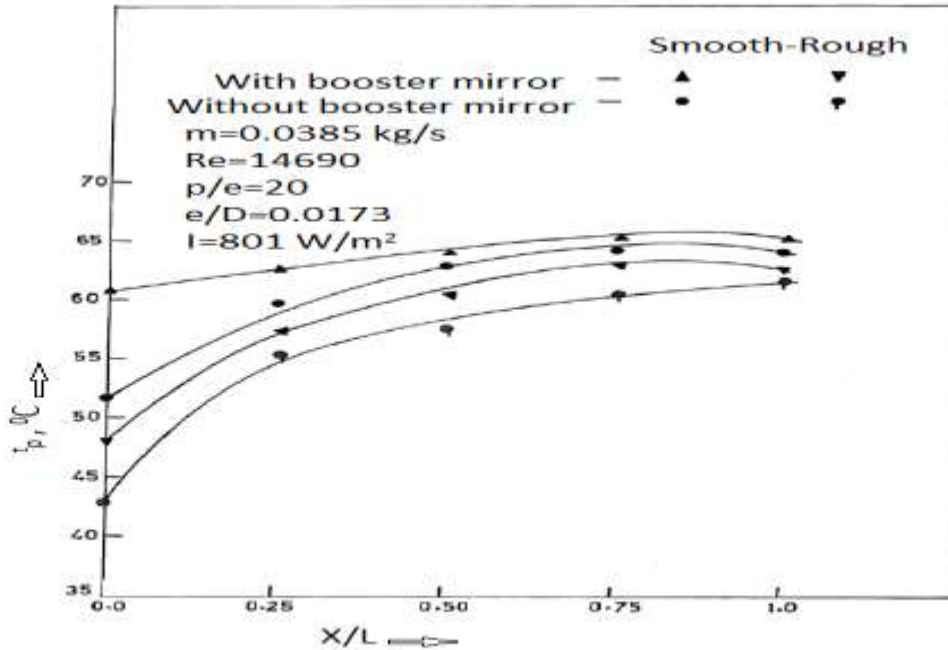


FIG. 1.14 EFFECT OF BOOSTING IN SOLAR AIR HEATERS

**EFFECT OF ROUGHNESS AND FLOW PARAMETERS IN SOLAR AIR HEATERS**

Use of artificial roughness of different configurations has been used in plenty to enhance the heat transfer rate in solar air heaters during the last decades. Varying magnitudes of roughness result in varying values of heat transfer and friction factor enhancement. The wide range of relative roughness height covered was 0.001-0.0333. The data was correlated according to the law of wall similarity, by the friction similarity function (Webb et.al., 1971, a,b).

$$u_e^+(e^+) = \sqrt{(2/f)} + 2.5 \ln(2e/D) + 3.75 \tag{1}$$

Dipprey and Sabersky, (1963) developed a heat momentum transfer analogy relation for flow in sand-grain roughened tubes. Three rough tubes were tested, having effective roughness ratios equal to 0.0488, 0.0138 and 0.0024 in the Reynolds number range of 60000 to 500000 in while the Prandtl number ranged from 1.2 to 5.95. The correlation developed was:-

$$\frac{(C_F/2C_H)^{-1}}{\sqrt{(C_F/2)}} + A_f = g(e^+, Pr) \tag{2}$$

Based on the approach considered by Han, (1984), analysis for the effect of artificial roughness was made by Prasad and Saini, (1988), for heat transfer and friction factor in a solar air heater using small diameter wire artificial roughness on the top surface, having relative roughness pitch of 10, 15, 20 and relative roughness height of 0.020, 0.027 and 0.033 to predict for a correlation for the average Nusselt number written under as:

$$\overline{Nu} = \frac{\bar{f}/2}{1 + (\sqrt{\bar{f}/2}) [4.5(e^+)^{0.28} Pr^{0.57 - 0.95(P_r/D)^{0.53}}]} Re Pr \tag{3}$$

(Han et al., 1991) studied the effect of parallel and V-shaped staggered discrete ribs and found out that 60° staggered discrete V-shaped ribs provide higher heat transfer than that for the parallel discrete ribs. Experiments



## Global Journal of Engineering Science and Research Management

were conducted by (Lau et al., 1991 a, b, c) to study the effect of discrete V-shaped ribs on turbulent heat transfer and friction for fully developed flow of air in a square channel. They found that the average Stanton number for the inclined 45<sup>0</sup> and 60<sup>0</sup> ribs was 20-35% higher than in the 90<sup>0</sup> full rib cases. (Gupta et al, 1993) used transverse wire roughness on the top surface in a solar air heater to investigate for the effect of solar air heater duct aspect ratio and relative roughness height for a relative roughness pitch of 10 and flow Reynolds number of 3000-18000 to arrive at the following correlations:

$$\text{For } e^+ < 35, \text{Nu}_r = 0.000824 \left(\frac{e}{D}\right)^{-0.178} \left(\frac{W}{H}\right)^{0.288} (\text{Re})^{1.62} \quad (4)$$

$$\text{For } e^+ \geq 35, \text{Nu}_r = 0.00307 \left(\frac{e}{D}\right)^{0.469} \left(\frac{W}{H}\right)^{0.245} (\text{Re})^{0.812} \quad (5)$$

Studies conducted by Saini and Saini, (1997) deals with the effect of expanded wire mesh geometry parameter of relative long way length of mesh, relative short way length of mesh and relative roughness height of mesh on heat transfer. Comparison of thermal performance of roughened absorber plate fixed with staggered discrete V-apex (up and down) was done by (Muluwork et al., 1998, 2000). The increase of relative roughness length ratio in the range of 3-7, increases Stanton number. Boosting in Stanton number ratio was found to be of order of 1.32-2.47. (Karwa et. al., 1999) developed heat transfer coefficient and friction factor correlations in rib-roughened solar air heater duct for transitional flow.

Verma and Prasad, (2000) developed the correlation for heat transfer in a top side artificially roughened solar air heater for fully developed turbulent flow as under:

$$\text{Nu}_r = 0.08596 \left(\frac{P}{e}\right)^{-0.054} \left(\frac{e}{D}\right)^{0.072} (\text{Re})^{0.728}, \text{ for } e^+ \leq 24 \quad (6)$$

$$\text{Nu}_r = 0.02954 \left(\frac{P}{e}\right)^{-0.016} \left(\frac{e}{D}\right)^{0.021} (\text{Re})^{0.802}, \text{ for } e^+ > 24 \quad (7)$$

(Bhagoria et al., 2002) used wedge shaped transverse repeated rib roughness on one broad heated wall of solar air heater duct and generated data pertinent to friction and heat transfer. They analyzed that the presence of wedge shape ribs yield maximum enhancement in Nusselt number, about 2.4 times as compared to smooth duct. Nusselt number increases and attains maximum value at a wedge angle of about 10<sup>0</sup> and then sharply decreases with increasing wedge angle beyond 10<sup>0</sup>. The correlations developed were:-

$$\bar{\text{Nu}} = 1.89 \times 10^{-4} \text{Re}^{1.21} \left(\frac{e}{D}\right)^{0.426} \left(\frac{P}{e}\right)^{2.94} \times \exp\left[-0.71\{\ln(P/e)\}^2\right] \left(\frac{\varphi}{10}\right)^{-0.018} \times \exp\left[-1.5\{\ln(\varphi/10)\}^2\right] \quad (8)$$

$$\bar{f} = 12.44 \left(\frac{e}{D}\right)^{0.99} \left(\frac{\varphi}{10}\right)^{0.49} \text{Re}^{-0.18} \left(\frac{P}{e}\right)^{-0.52} \quad (9)$$

(Momin et al., 2002) experimented on flow through duct roughened with V-shape ribs attached to the underside of one broad wall of the duct, to collect data on heat transfer and fluid flow characteristics. They observed that the Nusselt number increases with an increase of Reynolds number. It was found that for relative roughness height of 0.034 and for angle of attack of 60<sup>0</sup>, the V-shaped ribs enhance the values of Nusselt number by 1.14 and 2.3 times respectively over inclined ribs and smooth plate case at Reynolds number of 17034 and arrived the correlations as:-

$$\bar{\text{Nu}} = 0.067 \text{Re}^{0.888} \left(\frac{e}{D}\right)^{0.424} \left(\frac{\alpha}{60}\right)^{-0.077} \times \exp\left[-0.782\{\ln(\alpha/60)\}^2\right] \quad (10)$$

$$\bar{f} = 6.266 \left(\frac{e}{D}\right)^{0.565} \left(\frac{\alpha}{60}\right)^{-0.093} \text{Re}^{-0.425} \exp\left[-0.719\ln(\alpha/60)^2\right] \quad (11)$$



## Global Journal of Engineering Science and Research Management

Karwa, (2003) had conducted experimental study on heat transfer and friction characteristics in a high aspect ratio duct with transverse, inclined, V-up continuous and V-down continuous, V-up discrete ribs and V-down discrete ribs. He investigated that enhancement in Stanton number over smooth duct was found to be 65-90%, 87-112%, 102-137%, 110-147%, 93-134% and 102-142% respectively. The friction factor ratio for V-up continuous and V-down continuous, V-up discrete ribs and V-down discrete ribs was found to be 3.92, 3.65, 2.47 and 2.58 respectively and the correlations arrived are:

$$G = 32.26e^{-0.006(W/H)^{0.5}}(p/e)^{2.56}\exp[0.7343\{\ln(p/e)\}^2](e^+)^{-0.08} \quad (12)$$

For  $7 \leq e^+ \leq 20$

$$R = 1.66(e^+)^{-0.0078}(W/H)^{-0.4}(p/e)^{2.695}\exp[-0.762\{\ln(p/e)\}^2](e^+)^{-0.075} \quad (13)$$

For  $20 \leq e^+ \leq 60$

$$R = 1.325(e^+)^{-0.0078}(W/H)^{-0.4}(p/e)^{2.695}\exp[-0.762\{\ln(p/e)\}^2] \quad (14)$$

(Cho et al., 2003) experimentally investigated the effect of gap in the inclined ribs on heat transfer in square duct with rib to pitch height ratio of 8 and angle of attack of  $60^\circ$ . Experiments were carried out by maintaining the gap width same as the rib width and by varying the gap position over the duct width for parallel and cross rib arrangement on two opposite walls, they investigated that, the inclined rib with a downstream gap shows significant enhancement in heat transfer as compared to that of continuous inclined rib arrangement.

Sahu and Bhagoria, (2005) investigated effect of  $90^\circ$  broken transverse ribs on heat and fluid flow characteristics using roughness height of 1.5 mm, duct aspect ratio value of 8, pitch in the range of 10-30 mm and Reynolds number in the range of 3000-12000. Heat transfer enhancement was reported to be 1.25-1.4 times over smooth duct. From the experiment maximum thermal efficiency was found in the order of 83.5%.

The effect of relative roughness pitch, relative roughness height and relative groove position on the heat transfer coefficient and friction factor has been studied experimentally by (Jaurkur et al., 2006) using rib-grooved roughness and the correlations arrived are:

$$Nu = 0.00206Re^{0.936}(e/D)^{0.349}(p/e)^{3.318}\exp[-0.868\{\ln(p/e)\}^2](g/p)^{1.108}\exp[2.486\{\ln(g/p)\}^2 + 1.405\{\ln(g/p)\}^3] \quad (15)$$

$$f = 0.0012Re^{-0.199}(e/D)^{0.585}(p/e)^{7.19}\exp[-1.854\{\ln(p/e)\}^2](g/p)^{0.645}\exp[1.513\{\ln(g/p)\}^2 + 0.8662\{\ln(g/p)\}^3] \quad (16)$$

CFD investigation using ten different ribs namely rectangular, square, chamfered, triangular etc. is done by (Chaube et al., 2006). FLUENT CFD code is used for analysis using the SST k- $\epsilon$  turbulence model. The heat flux of  $1100 \text{ W/m}^2$  is provided on the absorber plate only and rib surface is kept adiabatic. Their study reported that highest heat transfer is achieved with chamfered ribs and the best performance index is found with rectangular ribs of size  $3 \times 5$ .

(Karmare et al., 2007) experimentally study the effect of heat transfer performance of a rectangular duct with metal grit ribs as roughness element, employed on one broad wall, transferring heat to the air flowing through it. The effect of relative length, height and pitch of the metal grid ribs on the heat transfer and friction factor has been studied for the flow range of Reynolds numbers 4000-17000. It has been found that maximum heat transfer rate was reported for the set of parameters and maximum friction factor was observed for the set of parameters. Correlations for Nusselt number and friction factor were developed based on the experimental results and were given by:

$$Nu = 2.4Re^{1/3}(e/D)^{0.42}(l/s)^{-0.146}(p/e)^{-0.27} \quad (17)$$

$$f = 15.55Re^{-0.26}(e/D)^{0.94}(l/s)^{-0.27}(p/e)^{-0.51} \quad (18)$$



## Global Journal of Engineering Science and Research Management

(Varun et al., 2008) experimentally used a combination of transverse and inclined ribs as roughness geometry and examined the thermal performance for the range of Reynolds number (Re), 2000-14000, pitch of ribs (p), 5-13 mm, roughness height (e), 1.6 mm and aspect ratio (W/H), of 10. Results show that the collector roughened with this type of roughness provides best performance at relative roughness pitch (p/e) of 8 and the correlations developed were:-

$$\bar{f} = 1.0858(\text{Re})^{-0.3685} (\text{p}/\text{e})^{0.0114} \quad (19)$$

$$\bar{\text{Nu}} = 0.0006(\text{Re})^{1.213} (\text{p}/\text{e})^{0.0104} \quad (20)$$

(Ahrwal et al., 2008) studied the effect of width and position of gap in inclined split-ribs having square cross section on heat transfer and friction characteristics of a rectangular air heater duct. The increase in Nusselt number and friction factor was in the range of 1.48-2.59 times and 2.26-2.9 times of the smooth duct respectively for the range of Reynolds numbers from 3000-18000 and the correlations arrived are:

$$\text{Nu} = 0.0102\text{Re}^{1.148} (\text{e}/\text{D})^{0.51} [1 - \{0.25 - \text{d}/\text{w}^2(0.01(1 - \text{g}/\text{e})^2)\}] \quad (21)$$

$$f = 0.5\text{Re}^{-0.0836} (\text{e}/\text{D})^{0.72} \quad (22)$$

Experimental study was performed by (Huang et al., 2008) for a measurement of heat transfer coefficients in a square channel with a perforation baffle on Nusselt numbers. Local heat transfer enhancement at the downstream of step baffle was found to be more significant when Reynolds number was large and when baffle height was higher. Heat transfer coefficient off centre was found to be better because of secondary flows that appeared off centre after the air flow passes through the baffle. The heat transfer enhancement in case of a baffle with holes was reported greater than that without holes.

Karwa and Maheshwari, (2009) made an experimental study of heat transfer and friction in a rectangular section duct with fully perforated baffles or half perforated baffles at relative roughness pitch of 7.2-28.8 affixed to one of the broader walls. They investigated that there was enhancement of 79-169% in Nusselt number over the smooth duct for the fully perforated baffles and 133-274% for the half perforated baffles while the friction factor for fully perforated baffles was found to be 2.98-8.02 times of that for the smooth duct and 4.42-17.5 times for the half perforated baffles. The correlations arrived are:

$$\text{Nu} = 0.0893 \text{Re}^{0.7608} \quad (23)$$

$$f = 0.1673 \text{Re}^{-0.0213} \quad (24)$$

An experimental investigation had been carried out by Bopche and Tandale, (2009) to study the heat transfer coefficient and friction factor by using artificially roughness in the form of inverted U-shaped turbulators, on the absorber surface of an air heater duct. As compared to smooth one, the enhancement in heat transfer and friction factor was reported of the order of 2.82 and 3.72 times, respectively and the correlations developed are:

$$\text{Nu} = 0.5429\text{Re}^{0.7054} (\text{e}/\text{D})^{0.3619} (\text{p}/\text{e})^{-0.1592} \quad (25)$$

$$f = 1.2134\text{Re}^{-0.2076} (\text{e}/\text{D})^{0.3285} (\text{p}/\text{e})^{-0.4259} \quad (26)$$

A 3D solar air heater duct provided with artificial roughness in the form of thin circular wire in arc shaped has been analyzed by (Kumar et al., 2009), using CFD. Renormalization k- $\epsilon$  turbulence model is used for analysis in FLUENT CFD code. Their study reveals the maximum value of overall enhancement ratio as 1.7 for the range of parameters investigated. A parametric study of artificial roughness geometry of expanded metal mesh type in the absorber plate of solar air heater duct has been carried out by (Gupta et al. 2009). The performance evaluation in terms of energy augmentation ratio (EAR), effective energy augmentation ratio (EEAR) and exergy augmentation ratio (EXAR) has been carried out for various values of Reynolds number and roughness parameters of expanded



metal mesh roughness geometry in the absorber plate of solar air heater duct. It was investigated that the augmentation ratios decrease at faster rate with Reynolds number in order of EAR, EEAR and EXAR. It was also studied that augmentation ratios increase with increase in duct depth and intensity of solar radiation. Thermal performance of wire-screen metal mesh was experimentally studied by (Paswan et al., 2009) as artificial roughness geometry on the underside of absorber plate. The thermal performance enhancement of a solar air heater was depended strongly upon the diameter of the wire and pitch, mass flow rate, insulation and inlet temperature. It was investigated that decreasing wire pitch, thermal performance of a solar air heater increases.

Sriromrein and Promvong, (2010) studied that heat transfer and friction characteristic of a rectangular duct roughened artificially with Z-shaped ribs. The enhancement in heat transfer rate and best thermal performance was reported for Z-rib inclined at 45°. (Hans et al., 2010) developed multiple V-rib roughness and performed extensive experimentation to collect data on heat transfer and fluid flow characteristics of a roughened duct. Maximum enhancement in Nusselt number and friction factor due to presence of multi v-rib roughness has been found to be 6 and 5 times, respectively, in comparison to the smooth duct. The maximum enhancement in heat transfer has been achieved corresponding to relative roughness width (W/w) of 6. It has been observed that Nusselt number attain maximum value at 60° angle of attack. The correlations proposed were:-

$$\bar{Nu} = 3.35 \times 10^{-5} Re^{0.92} (e/D)^{0.77} (W/w)^{0.43} (\alpha/90)^{-0.49} \times \exp[-0.1177\{\ln(W/w)\}^2] \times \exp[-0.61\{\ln(\alpha/90)\}^2] (P/e)^{8.54} \times \exp[-2.0407\{\ln(P/e)\}^2] \quad (27)$$

$$\bar{f} = 4.47 \times 10^{-4} Re^{-0.3188} (e/D)^{0.73} (W/w)^{0.22} (\alpha/90)^{-0.39} \times \exp[-0.52\{\ln(\alpha/90)\}^2] (P/e)^{8.9} \exp[-2.133\{\ln(P/e)\}^2] \quad (28)$$

(Champookham et al., 2010) carried out an experimental investigation to study the effect of combined wedge ribs and winglet type vortex generators on heat transfer and friction loss behaviors for turbulent air flow through a constant heat flux channel. Experimental investigations of heat transfer, flow friction and thermal performance factor characteristics in a tube fitted with delta winglet twisted tape, using water as working fluid was done by Eiamsa-ard et al., (2010). In the study, they described the influences of the oblique delta-winglet twisted tape and straight delta-winglet twisted tape arrangements and found that the oblique delta-winglet twisted tape is more effective turbulators giving higher heat transfer coefficient than the straight delta-winglet twisted tape. A numerical investigation had been carried out by Kwankaomeng et al., (2010) to study laminar flow and heat transfer characteristics in a 3D isothermal wall square-channel with 30° staggered angled-baffles. The studied the effect of different baffle heights at a single pitch ratio of 3 on heat transfer and pressure loss in the channel. The vortex flow was created by using the 30° angled baffle cavities leading to drastic increase in heat transfer in the channel. The order of enhancement is about 100-650% for using the angled baffles with blockage ratio of 0.1-0.3. The heat transfer augmentation was associated with enlarged pressure loss ranging from 1 to 17 times above the smooth channel. A thermal enhancement factor for the inclined baffles at blockage ratio of 0.15 was found to be highest about 2.9. (Karmare et al., 2010) had carried out analysis using CFD on solar air heater with a absorber plate roughened with metal ribs of circular, square and triangular cross-section having 54°, 56°, 58°, 60° and 62° inclinations to the air flow. The system and operating parameters studied were: e/D = 0.044, p/e = 17.5 and l/s = 1.72. Range of Reynolds number was 3600-17000. Their study reported that maximum heat transfer is obtained with the square cross-section ribs 58° angle of attack and there is 30% enhancement in the heat transfer for square plate over smooth surface. A numerical investigation had been carried out by Promvong et al., (2010) to examine the laminar flow and heat transfer characteristics in a three dimensional isothermal wall square channel with 45° angled baffles. In order to generate a pair of mainstream wise vortex flows through the tested section, baffles with an attack angle of 45° were mounted in tandem and in-line arrangement on the lower and upper walls of the channel. Effects of different baffle heights on heat transfer and pressure loss in the channel were studied and results of the 45° in-line baffle were also compared with those of the 90° transverse baffle and the 45° staggered baffle. The effect of wedge-shaped transverse ribs roughness on flow through a rectangular duct of a solar air heater is studied using CFD by Gandhi et al., (2010). A 2D CFD simulation is carried out using FLUENT on a duct having relative roughness pitch of 4.5, relative roughness height of 0.022 and rib wedge angle of 15°. The



results of numerical analysis are in good agreement with the experimental results in terms of velocity profile and turbulence intensity.

To study the effect on the thermal performance of the ribbed channel, the parallel ribs have been installed either onto one wall of the channel or, in-line, onto two opposite walls with a rib pitch-to-height ratio ranging from 6.66-20.0. (Kumar et al., 2011) have investigated for the enhancement of heat transfer coefficient of a solar air heater having roughened air duct with a provision of artificial roughness in the form of  $60^\circ$  inclined discrete ribs. For the relative roughness pitch of 12, relative gap position of 0.35 and relative roughness height of 0.0498, the maximum heat transfer enhancement takes place. Statistical correlations for friction factor and Nusselt number have been derived as a function of gap position, rib depth, pitch and Reynolds number. The correlations have been established to predict the values of friction factor and Nusselt number with an average absolute standard deviation of 3.4% and 3.8% respectively and have been given by:-

$$Nu = 3 \times 10^{-5} Re^{0.947} (e/D)^{0.29} (P/e)^{5.885} (d/W)^{0.115} \times \exp[-1.237 \{\ln(P/e)^2\}] \quad (29)$$

$$f = 0.0014 Re^{-0.23} (e/D)^{0.804} (P/e)^{4.516} (d/W)^{0.097} \times \exp[-0.944 \{\ln(P/e)^2\}] \quad (30)$$

An experimental investigation for heat transfer and friction factor was carried out by (Lanjewar et al., 2011), having the characteristics of a rectangular duct roughened W-shaped ribs, that is arranged at an inclination with respect to the flow direction. The duct used, had a width to height ratio of 8, relative roughness pitch of 10, relative roughness height of 0.03375 and angle of attack of flow of  $30^\circ$ - $75^\circ$  and the correlations proposed were:-

$$R = \sqrt{(2/f)} + 2.5 \ln(2e/D) + 3.75 \quad (31)$$

$$e^+ = \sqrt{(f/2)} Re(e/D) \quad (32)$$

$$g' = \left[ \left( \frac{f}{2S_t} \right) - 1 \right] \sqrt{(2/f)} + R \quad (33)$$

An experimental investigation was conducted by (Bhushan et al., 2011) for a range of system and operating parameters in order to analyze the effect of artificial roughness on heat transfer and friction in solar air heater duct having protrusions as roughness geometry. Maximum enhancement of Nusselt number and friction factor has been found 3.8 and 2.2 times respectively in comparison to smooth duct for the investigated range of parameters. Maximum enhancement in heat transfer coefficient has been found to occur for relative short way length (S/e) of 31.25, relative long way length (L/e) of 31.25 and relative print diameter (d/D) of 0.294. The correlations developed are:

$$Nu = 2.1 \times 10^{-88} Re^{1.452} (S/e)^{12.94} (L/e)^{99.2} (d/D)^{-3.9} \exp[-10.4 \{\log(S/e)\}^2] \exp[-77.2 \{\log(L/e)\}^2] \exp[-7.83 \{\ln(d/D)\}^2] \quad (34)$$

$$f = 2.32 Re^{-0.201} (S/e)^{-0.383} (L/e)^{-0.484} (d/D)^{0.133} \quad (35)$$

(Pomovonge et al., 2011) experimentally studied the effects of combined ribs and delta-winglet type vortex generators (DWs) on forced convection heat transfer and friction loss behaviors for turbulent air flow through a solar air heater channel. Rectangular channel with aspect ratio of 10, height of 30 mm with Reynolds number in the range of 5000-20000 was used. They reported that combined rib and the DW provides considerable heat transfer augmentations,  $\frac{Nu}{Nu_0} = 2.3 - 2.6$  and also causes a moderate pressure drop increase,  $f/f_0 = 4.7 - 10.1$ , depending on the attack angle and Re values.



## Global Journal of Engineering Science and Research Management

An experimental study has been carried out by (Yadav et al., 2012) to study the effect of heat transfer and friction characteristics of turbulent flow of air passing through rectangular duct which is roughened by circular protrusions arranged in angular arc fashion. The investigation reported the maximum enhancement in heat transfer and friction factor as 2.89 and 2.93 times as compared to smooth duct. The correlations arrived are:

$$Nu = 0.154Re^{1.017}(p/e)^{-0.38}(e/D)^{0.521}(\alpha/60)^{-0.213}\exp[-2.023\{\ln(\alpha/60)\}^2] \quad (36)$$

$$f = 7.207Re^{-0.56}(p/e)^{-0.18}(e/D)^{0.176}(\alpha/60)^{0.038}\exp[1.412\{\ln(\alpha/60)\}^2] \quad (37)$$

CFD analysis on solar air heater is done by (Sharma et al., 2012) using V-shaped ribs roughness on the underside of the absorber plate. Finite volume method with semi-implicit method for pressure linked equation algorithm is used for computations. Reynolds number range was from 5000-15000. The results obtained show that the combined effect of swirling motion, detachment and reattachment of the fluid were responsible for the increase of heat transfer rate during CFD analysis. Nusselt number increases and friction factor decreases with increase in Reynolds number for all combination of relative roughness height (e/D) and relative roughness pitch (p/e). An average percentage deviation predicted between CFD and exact solution was found less than  $\pm 3\%$  V-shaped rib roughness found to give high rate of heat transfer. A numerical investigation on laminar flow and heat transfer characteristics in a 3D isothermal wall square-channel fitted with in-line  $45^\circ$  V-shaped baffles on two opposite wall was done by (Promvong et al., 2012). The in-line V-baffles with its V-tip pointing downstream and the angle of attack of  $45^\circ$  relative to the flow direction were mounted repeatedly on the lower and upper walls. The V-baffled channel flow was found to be fully developed periodic flow and heat transfer profiles at about  $x/D=8$  downstream of the tested channel inlet. It was reported that the P-vortex flow caused by the V-baffle induced impingement flows on the channel walls leading to drastic increase in the heat transfer rate. The heat transfer in the V-baffled channel was found to be about 1-21 times higher than the smooth channel with no baffle.

Experimental investigation has been carried out by (Chauhan et al., 2013) to study heat transfer and friction factor characteristics using impinging jets in solar air heaters duct. The study shows that there is considerable enhancement in heat transfer and friction factor by 2.67 and 3.5 times respectively and the correlations arrived were:

$$Nu = 1.658 \times 10^{-3} Re^{0.8512} (X/D_h)^{0.1761} (Y/D_h)^{0.141} (D_j/D_h)^{-1.9854} [\exp -0.3498\{\ln(D_j/D_h)\}^2] \quad (38)$$

$$f = \left[ \frac{0.3475 Re^{-0.5244} \left(\frac{X}{D_h}\right)^{0.4169} \left(\frac{Y}{D_h}\right)^{0.5321} \left(\frac{D_j}{D_h}\right)^{-1.4848}}{\exp[-0.22210\{\ln(D_j/D_h)\}^2]} \right] \quad (39)$$

Prasad, (2013) represented the experimental results on heat transfer and thereby thermal performance of artificially roughened solar air heaters for fully developed turbulent flow. Such solar air heaters have been found to give considerably high value of collector heat removal factor ( $F_R$ ), collector efficiency factor ( $F'$ ) and thermal efficiency ( $\eta_{th}$ ) as compared to the corresponding values of those of smooth collectors. In the range of the operating parameters investigated, the ratio of the respective values of the parameters  $F_R$ ,  $F'$  and  $\eta_{th}$  for the roughened collectors to the smooth collectors have been found to be 1.786, 1.806 and 1.842 respectively and the correlations arrived were:-

$$\bar{Nu} = \left(\frac{\bar{f}}{2}\right) RePr / \left[1 + \sqrt{\left(\frac{\bar{f}}{2}\right)} \left\{4.5(e^+)^{0.28} Pr^{0.57} - 0.95(P/e)^{0.53}\right\}\right] \quad (40)$$

$$\bar{f} = \frac{2}{[0.95(P/e)^{0.53} + 2.5 \ln(D/2e) - 3.75]^2} \quad (41)$$





## Global Journal of Engineering Science and Research Management

A CFD based investigation of turbulent flow through a solar air heater is carried out by [Yadav and Bhagoria, \(2013, a\)](#) with square sectioned transverse rib roughness. The 2D analysis of rectangular duct is performed using ANSYS FLUENT 12.1 software and using (RNG  $k-\epsilon$ ) turbulence model. Analysis using four different configurations of rib roughness keeping relative roughness pitch constant at  $p/e = 14.29$  and six different values of Reynolds number, ranging from 3800-18000, reveals that the relative roughness height is a vital factor and mainly affects the rate of heat transfer rate and the increase in flow friction. An investigation has been conducted by [Yadav and Bhagoria, \(2013, b\)](#) by using FLUENT 12.1 and (RNG  $k-\epsilon$ ) turbulence model on solar air heater, using square sectioned transverse rib roughness, with different values of relative roughness pitch ( $7.14 \leq p/e \leq 17.86$ ). 2D CFD analysis to predict the effect of small diameter of transverse wire rib roughness on heat transfer enhancement in solar air heater is done by [Yadav and Bhagoria, \(2013, c\)](#). In this analysis also FLUENT 12.1 software is used with (RNG  $k-\epsilon$ ) turbulence model. Results on thermal and thermo hydraulic performance of wavy finned absorber plate solar air heaters have been reported recently ([Priyam and Chand, 2016](#)). [Chouksey and Sharma, \(2016\)](#), investigated for the thermal performance characteristics of solar air heater having its duct with blackened wire screen matrices. [Kumar et al., 2017e](#), have given a CFD analysis for solar air heater with corrugated absorber plate in which it was shown that the Renormalization-group  $k$ -epsilon model provides the results close to those, worked out from available empirical co-relation for two-dimensional steady flow solar air heaters. An energetic and exergetic approach for the performance of packed bed solar air heaters with blackened wire screen matrices pack was taken by [Kumar et al., 2017f](#). The characteristic equations for heat transfer and fluid flow in packed bed solar air heaters have been used in order to analyze the effect of system and operating parameters on energy and energy performance. Finite difference solution algorithm has been developed to obtain numerical solutions of the governing equations. Results revealed that mass flow rate of air are a strong parameter affecting the effective and energetic efficiencies.

However, in all the above cases, the provision of artificial roughness and glass cover has remained limited to only one side (top side) of the solar air heater duct except those of the recent ones ([Prasad et al., 2014](#); [Kumar et al., 2016a](#), [Behura et al., 2016a](#); [Behura et al., 2017](#); [Behura et al., 2016b](#); [Kumar et al., 2016b](#); [Kumar et al., 2017a](#)), wherein it has been concluded that three sides roughened and glass covered solar air heaters perform even better than those of one side roughened and glass covered solar air heaters, but friction factor also increases. ([Prasad et al., 2014](#)) analyzed with respect to fluid flow and heat transfer in a novel solar air heater having artificial roughness on three sides (the two side walls and the top side) of the rectangular solar air heater duct, with three sides glass covers. Equations for friction factor and heat transfer parameter have been developed. The analytical values of friction factor and heat transfer parameter have been found to be 2 to 40% more and 20 to 75% more than those of the respective values of ([Prasad and Saini, 1988](#)) for the same range of the values of operating parameters  $p/e$ ,  $e/D$  and  $Re$  and fixed values of  $W$  and  $B$ . The correlations developed are:-

$$\overline{Nu}_r = \frac{\overline{f}_r/2}{1 + \left(\frac{\overline{f}_r/2}{4.5(e^+)^{0.28} Pr^{0.57} - 0.95(p/e)^{0.53}}\right)} Re Pr \quad (42)$$

$$\overline{f}_r = \frac{(W+2B) \left[ \frac{2}{\left\{ 0.95(p/e)^{0.53} + 2.5 \ln(D/2e) - 3.75 \right\}^2} \right] + Wf_s}{2(W+B)} \quad (43)$$

[Behura et al., \(2016\)](#), investigated experimentally the heat transfer, friction factor and thermal performance of a novel type of three sides artificially roughened and three sides glass covered solar air heaters under fully developed turbulent flow conditions and compare well with analytical values of [Prasad et al., \(2014\)](#).

The effect of glass cover has been shown ([Kumar et al., 2016c](#)) by performing an investigation, that has given even better performance for three sides glass covers as compared to that of the one side glass covered one. The authors ([Prasad et al., 2015](#)), analysis could reveal that,  $e_{opt}^+ = 23$ , corresponds to the optimal thermo hydraulic performance in three sides artificially roughened and glass covered solar air heaters, which have further been verified by taking an experimental investigation ([Kumar et al., 2017b](#)). Investigation for jet plate solar air heater with longitudinal fins has been carried out by [Kumar et al., 2017c](#). Use of booster mirror in three sides solar air



heaters for characterizing thermal performance and heat transfer & plate temperature behaviors has been introduced (Kumar, 2016a and 2016b). Further the review papers given (Ravi Kumar et al., 2016 and Kumar and Alam, 2016), may be useful in vital studies of roughness importance in the field of solar air heater performance. Correlations for three sides artificially roughened solar air heaters with transverse wires have been developed (Kumar et al., 2017d), for three sides roughened one as well as three sides glass covered solar air heaters. Correlations for Nusselt number and friction factor have been developed in terms of roughness and flow parameters as under:

$$Nu_{3r} = 0.1415(p/e)^{-0.0713}(e/D)^{0.0871}(Re)^{0.746} \quad \text{For } e^+ \leq 23 \quad (44)$$

$$Nu_{3r} = 0.0422(p/e)^{-0.0461}(e/D)^{0.0375}(Re)^{1.208} \quad \text{For } e^+ > 23 \quad (45)$$

$$f_{3r} = 0.372(p/e)^{-0.319}(e/D)^{0.354}(Re)^{-1.76} \quad (46)$$

$$Nu_{3gs} = 0.0782(P_r)^{0.5}(f_s)^{0.7}(Re)^{0.932} \quad (47)$$

### OPTIMIZATION OF THE SYSTEM PARAMETERS

As the enhancement of heat transfer coefficient is attempted by providing artificial roughness, it always goes with an increment of pressure drop and the requirement of pumping power is increased. So, there is a need to optimize the system parameters to maximize heat transfer while keeping friction losses as low as possible.

Despite plenty of works dealing with the effect of artificial roughness on heat transfer and friction factor in solar air heaters, very few dealt with the thermo hydraulic performance in them. The thermo hydraulic optimization parameter,  $e^+ = \frac{e}{D} \sqrt{\frac{f}{2}} Re$ , known as roughness Reynolds number, has been considered to arrive at the optimal thermo hydraulic performance condition. Covering a wide range of the values of heat transfer surface area, overall heat conductance and flow friction power, (Webb and Eckert, 1971), arrived at the conclusion that the value of the parameter,  $e^+ = 20$ , gives the optimal thermo hydraulic performance. For optimal thermo hydraulic performance of circular tube roughened with ribs, Lewis, (1975), introduced new efficiency parameters ( $L^{-1}$ ,  $B^{-1}$ ,  $C^{-1}$ ,  $G_H$  and  $R_M$ ) and arrived at the conclusion that the value of the roughness Reynolds number  $h^+ = e^+ = 20$ , corresponds to the optimal thermo hydraulic condition. Sheriff and Gumbley, (1966), has studied for annulus with wire type roughness and found the value of roughness Reynolds number,  $e^+ = 35$ , for the optimal thermo hydraulic condition. Optimal thermo hydraulic performance analysis in one side artificially roughened solar air heater of (Prasad and Saini, 1991), has constituted a particular set of values of roughness and flow parameters to give the value of roughness Reynolds number,  $e^+ = 24$ , for optimal thermo hydraulic condition. Verma et al., (1991) have given a technical note on 'optimization of solar air heaters of different designs', to obtain the optimum flow channel depth and mass flow rate in 10 different designs of solar air heaters and have found that a single glazing solar air heater operating under double flow configuration gives the best performance. Hegazy, (1995) has developed an analytical criterion to determine the optimal flow channel depth of conventional flat plate solar air heaters. Gupta et al., (1997) have shown the effect of roughness parameters on the thermal as well as the thermo hydraulic performance of roughened solar air heaters to design the optimal operating conditions. A technical note on 'optimal thermo hydraulic performance of flat plate solar air heaters, operating with fixed or variable pumping power', has been given by Hegazy, (1999). Optimal thermo hydraulic performance of solar air heaters has been investigated (Verma and Prasad, 2000), for the maximum heat transfer and minimum pressure drop to arrive at the conclusion that the value of  $e^+ = 24$ , corresponds to the optimal thermo hydraulic performance. Saha and Mahanta, (2001) have investigated for the performance of second-law modeling of flat plate collectors with the objective of describing collector performance when entropy generation is minimum. Karwa et al., (2001) have investigated for thermo hydraulic performance of solar air heaters with chamfered repeated rib-roughness on the air flow side of the absorber plates for the range of flow Reynolds number, 3750-16350. Mittal and Varshney, (2005), has worked on optimal thermo hydraulic performance of wire mesh packed solar heater. Second law optimization of solar air heater having chamfered rib groove as a roughness element has been analyzed by Layek, et al., (2007). Karmare and Tikekar, (2008), have optimized the thermo hydraulic performance of solar air heater integrated with metal rib as roughness element. Karmare and Tikekar, (2009) have



## Global Journal of Engineering Science and Research Management

investigated for the effect of metal rib grifts on absorber plate at  $60^{\circ}$  of angle of attack to the flow direction of air on the thermo hydraulic performance of solar air heater. Siddhartha et al., (2012) have undertaken the work with an objective to develop and implement a trained particle swarm optimization algorithm for prediction of an optimized set of design and operating parameters for a smooth flat plate solar air heater. Yadav and Bhagoria, (2014), investigated numerically a CFD based thermo hydraulic performance analysis of an artificially roughened solar air heater having equilateral triangular sectioned rib roughness on the absorber plate. A numerical investigation is conducted to analyze the two-dimensional incompressible Navier–Stokes flows through the artificially roughened solar air heater for relevant Reynolds number ranges from 3800 to 18,000. Twelve different configurations of equilateral triangular sectioned rib ( $p/e = 7.14–35.71$  and  $e/D = 0.021–0.042$ ) have been used as roughness element. Sharma and Kalamkar, (2015), reviewed the thermo hydraulic performance of solar air heater having artificial roughness elements and reported the various artificial roughness geometries used by investigators to enhance the heat transfer, which is attained by increasing the pressure drop across the surfaces of the absorber plate of the solar air heater and its effect on heat transfer and friction factor through experiments.

### CONCLUSIONS

On the basis of above brief description above roughness and flow parameters following are the major conclusions have been made:-

- 1) It can be concluded from the present review that lot of work has been carried out to investigate the effect of artificial roughness of different shapes and sizes on heat transfer and friction factor.
- 2) Substantial enhancement in the heat transfer can be achieved with little penalty of friction.
- 3) Various investigators have developed correlations for heat transfer and friction factor for solar air heater ducts having artificial roughness of different geometries.
- 4) These correlations can be used to predict the thermal as well as thermohydraulic performance of solar air heaters having roughened ducts.
- 5) Use of booster mirror to such solar air heaters may give better result as compared to the conventional one.

### REFERENCES

1. Aharwal, K. R., Gandhi, B. k. and Saini, J. S., 2008. Experimental investigation on heat transfer enhancement due to a gap in an inclined continuous rib arrangement in a rectangular duct of solar air heater, *Renew. Energy*, 33, 585-596.
2. Altermani, C.A.C. and Sparow, E.M., 1980. Turbulent heat transfer and fluid flow in an unsymmetrically heated triangular duct, *Trans. ASME, J. Heat Mass Transfer*, 102, 590.
3. Behura, K. Arun, Prasad, B. N., Prasad, L., 2016. Heat transfer, friction factor and thermal performance of three sides artificially roughened solar air heaters. *Sol. Energy*. 130, 46-59.
4. Behura K. Arun, Rout S. K., Pandya, H. and Kumar Ashwini., 2017. Thermal analysis of three sides artificially roughened solar air heaters. *Energy Procedia*. 109, 279-285.
5. Behura A. K., Kumar Ashwini, Kumar Ravi and Mishra S., 2016b. Heat transfer enhancement of three sides artificially roughened solar air heater. *Applied Science and Materials International*, 2 (4-6 March), 96-100, Bhubaneswar, India
6. Bernier, M.A. and Plett, E.G., 1988. Thermal performance representation and testing of air solar collectors, *Trans. ASME*, 110, 74-81.
7. Bhagoria, J. L., Saini, J. S. and Solanki, S. C., 2002. Heat transfer coefficient and friction factor correlations for rectangular solar air heater duct having transverse wedge shaped rib roughness on the absorber plate, *Renew. Energy*, 25, 341-369.
8. Bhushan, B. and Singh, R., 2011. Nusselt number and friction factor correlations for solar air heater duct having artificially roughened absorber plate, *Sol. Energy*, 133, 1277-1287.
9. Biondi, P., Cicala, L. and Farina, G., 1988. Performance analysis of solar air heaters of conventional design, *Sol. Energy*, 41 (1), 101-107.
10. Bliss, R.W., 1959. The derivation of several plate efficiency factors useful in the design of flat plate solar heat collectors, *Sol. Energy*, 3, 55-64.
11. Bopche, S. B. and Tandale, M. S., 2009. Experimental investigation on heat transfer and frictional characteristics of turbulator roughened solar air heater duct, *Int. J. Heat Mass Transfer*, 52, 2834-2848.



## Global Journal of Engineering Science and Research Management

12. Chaube, A., Sahoo, P. K. and Solanki, S. C., 2006. Analysis of heat transfer augmentation and flow characteristics due to rib roughness over absorber plate of a solar air heater, *Renew. Energy*, 31 (3), 317-331.
13. Cho, H. H., Kim, Y. Y., Rhee, D. H. and Lee, S. Y., 2003. The effect of gap position in discrete ribs on local heat/mass transfer in a square duct, *J. Enhanced Heat Trans.*, 10, 287-300.
14. Champookham, T., Thianpong, C., Kwankaomeng, S. and Promvonge, P., 2010. Heat transfer augmentation in a wedge ribbed channel using winglet vortex generators, *Int. Commun Heat Mass Transfer*, 37, 163-169.
15. Chauhan, R. and Thakur, N. S., 2013. Heat transfer and friction factor correlations for impinging jet solar air heater, *Exp. Therm. Fluid Sci.*, 14, 760-767.
16. Chouksey, V.K. and Sharma, S.P., 2016. Investigations on thermal performance characteristics of wire screen packed bed solar air heater, *Sol. Energy*, 132, 511-605.
17. Dipprey, D. F. and Sabersky, R. H., 1963. Heat and momentum transfer in smooth and rough tubes at various Prandtl numbers, *Int. J. Heat Trans.* 6, 329-353.
18. Duffie, J.A. and Beckman, W.A., 1980. *Solar energy thermal processes*, Wiley Inter-science, New York.
19. Eiamsa-ard, S., Wongcharee, K., Eiamsa-ard, P. and Thianpong, C., 2010. Heat transfer enhancement in a tube using delta winglet twisted tapes inserts, *Appl. Therm. Engg.*, 30, 310-318.
20. Gandhi, B. K. and Singh, K. M., J-Mc, 2010. Experimental and numerical investigations on flow through wedge shape rib roughened duct, *Inst. Engg. (India)*, 90, 13-18.
21. Gillet, W.B., Aranviteh, E. and Moon, J.E., 1983. Solar collector testing in the European Community, *Int. J. Sol. Energy*, 1, 317-341.
22. Gupta, D. and Solanki, S. C., 1993. Heat and fluid flow in rectangular solar air heater ducts having transverse rib roughness on absorber plates, *Sol. Energy*, 51 (1), 31-37.
23. Gupta, M. K. and Solanki, S. K., 2009. Performance evaluation of solar air heater having expanded metal mesh as artificial roughness on absorber plate, *Int. J. Therm. Sci.*, 48, 1007-1016.
24. Gupta, D., Solanki, S. C. and Saini, J. S., 1997. Thermo-hydraulic performance of solar air heaters with roughened absorber plates, *Sol. Energy*. 61, 33-42.
25. Han, J.C., 1984. Heat transfer and friction channels with two opposite rib-roughened walls, *Trans. ASME J. of Heat Trans.* 106, 774-781.
26. Hans V. S., Saini, R. P. and Saini, J. S., 2010. Heat transfer and friction factor correlations for a solar air heater duct roughened artificially with multiple V-ribs, *Sol. Energy*, 84, 898-911.
27. Han, J. C., Zhang, Y. M. and Lee, C. P., 1991. Augmented heat transfer in square channels with parallel, crossed and V-shaped angled ribs, *Trans., ASME, J. Heat Trans.*, 113, 590-596.
28. Hegazy, A.A., 1995. Optimization of flow channel depth for conventional flat plate solar air heaters, *Renew. Energy*, 1, 15-21.
29. Hegazy, A.A., 1999. Optimizing the thermo hydraulic performance of flat plate solar air heaters operating with fixed/variable pumping power, *Renew. Energy*, 18, 283-304.
30. Huang, K. D., Tzeng, S.C., Jeng, T. M., Wang, J. R. Cheng, S. Y. and Tseng, K. T., 2008. Experimental study of fluid flow and heat transfer characteristics in the square channel with a perforation baffle, *Int. Commun Heat Mass Transfer*, 36, 264-268.
31. Jaurkur, A. R., Saini, J. S. and Gandhi, B. K., 2006. Heat transfer and friction factor characteristics of rectangular solar air heater duct using rib-grooved artificially roughness, *Sol. Energy*, 80 (8), 895-907.
32. Karwa, R., Solanki, S.C., Saini, J.S., 1999. Heat transfer coefficient and friction factor correlation for the transitional flow regime in rib roughened rectangular ducts. *Int. J. Heat Mass Trans.* 42, 1597-1615.
33. Karwa, R., Solanki, S.C., Saini, J.S., 2001. Thermo hydraulic performance of solar air heaters having integral chamfered rib roughness on absorber plates, *Energy*, 26, 161-176.
34. Karwa, R., 2003. Experimental studies of augmented heat transfer and friction in asymmetrical heated rectangular ducts with ribs on the heated wall in transverse inclined, V-continuous and V-discrete pattern, *Int. Commun Heat Mass Transfer*, 30, 241-250.
35. Karwa, R. and Maheshwari, B. K., 2009. Heat transfer and friction in an asymmetrically heated rectangular duct with half and fully perforated baffles at different pitches, *Int. Commun Heat Mass Transfer*, 36, 264-268.



## Global Journal of Engineering Science and Research Management

36. Karmare, S. V. and Tikekar, A. N., 2007. Heat transfer and friction factor correlation for artificially roughened duct with metal grit ribs, *Int. J. Heat Mass Transfer*, 50, 4342-4351.
37. Karmare, S. V. and Tikekar, A. N., 2009. Experimental investigation of optimum thermo hydraulic performance of solar air heaters with metal rib grits roughness, *Sol. Energy*. 83, 6-13.
38. Karmare, S. V. and Tikekar, A. N., 2010. Analysis of fluid flow and heat transfer in a rib grid roughened solar air heater using CFD, *Sol. Energy*, 84 (3), 409-417.
39. Kays, W.M., 1966. *Convective Heat and Mass Transfer*, McGraw Hill, New York.
40. Kays, W.M. and London, A.L., 1964. *Compact Heat Exchangers*, McGraw Hill, New York.
41. Khalid, A.J. and Shaker, M.M., 1987. An experimental investigation into a solar assisted desiccant-evaporative air conditioning system, *Sol. Energy*, 39 (2), 97-107.
42. Kumar, S. and Saini, R. P., 2009. CFD based performance analysis of a solar air heater duct provided with artificial roughness, *Renew. Energy*, 34, 1285-1291.
43. Kumar, S. T., Mittal, V., Thakur, N. S. and Kumar, A., 2011. Heat transfer and friction factor correlations for rectangular solar air heater duct having 600 inclined continuous discrete rib arrangements, *Br. J. Appl. Sci. Technol.*, 3, 67-93.
44. Kumar Ashwini, Singh K. D. P. and Prasad B. N., 2016a. Enhancement of collector performance parameters in three sides artificially roughened solar air heater. *ICASPCT-2016*, 17-19 March, Raigarh, India.
45. Kumar Ravi, Behura A. K., Kumar Ashwini and Dixit S.R., 2016. The effect of roughness and flow parameters for heat transfer enhancement in artificially roughened solar air heaters - A review. *Applied Science and Materials International*, 2 (4-6 March), 117-123, Bhubaneswar, India.
46. Kumar Ashwini, Kumar Ravi and Behura A. K., 2016b. Performance analysis of three sided artificially roughened solar air heaters. *Applied Science and Materials International*, 2 (4-6 March), 112-116, Bhubaneswar, India.
47. Kumar Ashwini, Kumar Ravi and Behura A. K., 2017c. Investigation for jet plate solar air heater with longitudinal fins. *Int. J. of Advanced Engineering and Science*, 2 (3), 112-119.
48. Kumar Ashwini, Prasad B. N. and Singh K. D. P., 2017a. Analysis of collector performance parameters in three sides artificially roughened and glass covered solar air heater. *Int. J. of Advanced Engineering and Science*, 2 (3), 224-229.
49. Kumar Ashwini, Prasad B. N., Singh K. D. P., 2017b. Thermal and thermo hydraulic performance of three sides artificially roughened solar air heaters. *Int. J. of Advanced Engineering and Science*, 2 (2), 215-231.
50. Kumar Ashwini, Prasad BN, Singh K D P., 2016c. Performance characteristics of three sides glass covered smooth solar air heaters. *Transylvanian Review*, 24 (11), 3247-3256.
51. Kumar Ashwini., 2016a. Plate temperature and heat transfer characteristics of three sides roughened and boosted solar air heaters. *Int. J. of Advanced Engineering and Science*, 1 (4), 168-172.
52. Kumar Ashwini., 2016b. Thermal performance characteristics of three sides artificially roughened solar air heaters with and without booster mirrors. *Int. J. of Advanced Engineering and Science*, 1 (4), 161-167.
53. Kumar Ashwini and Alam Mahmood., 2016. A review on comparative study of thermal performance of artificially roughened solar air heaters *Int. J. of Advanced Engineering and Science*, 1 (2), 4-12.
54. Kumar Ashwini, Prasad B. N. and Singh K. D. P., 2017c. Heat transfer and fluid flow characteristics of three sides artificially roughened and glass covered solar air heaters. *Int. Research Journal of Advanced Engineering and Science*, 2 (3), 230-244.
55. Kumar Ashwini, Mahato Abhijit and Behura A. K., 2017e. CFD Analysis of Solar Air Heater Having Corrugated Absorber Plate. *International Journal of Emerging Technology and Advanced Engineering*, 7 (9), 575-587.
56. Kumar Ashwini, Behura A. K., Kumar Ravi and Kumar Amit, 2017f. Wire Screen Matrices Packed Bed Solar Air Heater Performance-An Exergetic and Energetic Approach. *Journal for Advanced Research in Applied Sciences*, 4 (4), 90-108.
57. Kwankaomeng, S., Jed Sadaranachri, W. and Promvong, P., 2-4 June, 2010. Laminar periodic flow and heat transfer in square channel with 300 inclined baffles, PEA-AIT, International conference on energy



## Global Journal of Engineering Science and Research Management

and sustainable development: Issues and strategies (ESD 2010), The Empress Hotel, Chiang Mai, Thailand.

58. Lanjewar, A., Bhagoria, J. L. and Sarviya, R. M., 2011. Experimental study of augmented heat transfer and friction in solar air heater with different orientations of W-rib roughness, *EXP Therm. Fluid Sci.*, 35 986-995.
59. Layek, A., Saini, J. S. and Solanki, S. C., 2007. Second law optimization of a solar air heater having chamfered rib-groove roughness on absorber plate, *Renew. Energy*, 32, 1967-1980.
60. Lau, S. C., Kakraja, R. T. and Mc Millin, R. D., 1991 (a). Effect of V-shaped rib arrays on turbulent heat transfer and friction of fully developed flow in a square channel, *Int. J. Heat Mass Transfer*, 34, 1605-1616.
61. Lau, S. C., Mc Millin, R. D. and Han, J. C., 1991 (b). Heat transfer characteristics of turbulent flow in a square channel with angle discrete ribs, *ASME, J. Turbo-mech*, 113, 367-374.
62. Lau, S. C., Mc Millin, R. D. and Han, J. C., 1991 (c). Turbulent heat transfer and friction in a square channel with discrete and turbulators, *ASME, J. Turbo-mech*, 113, 360-366.
63. Lewis, M. J., 1975 (a). An elementary analysis for predicting the momentum and heat transfer characteristics of hydraulically rough surface, *Trans. ASME J. of Heat Trans.* 97, 249-254.
64. Lewis, M. J., 1975 (b). Optimizing the thermo hydraulic performance of rough surfaces, *Int. J. Heat Mass Trans.* 18, 1243-1248.
65. Malik, M.A.S. and Buelow, F.H., 1975. Hydro-dynamic and heat transfer characteristics of a heated duct, *Helio-technique and Development*, 2, 3.
66. Mittal, M. k. and Varshney, L., 2005. Optimal thermo hydraulic performance of a wire mesh Packed solar air heater, *Sol. Energy*, 80, 1112-1120.
67. Momin, A. M. E., Saini, J. S. and Solanki, S. C., 2002. Heat transfer and friction in solar air heater duct with V-shaped rib roughness on absorber plate, *Int. J. Heat Mass Transfer*, 45, 3383-3396.
68. Muluwork, K. B., Saini, J. S. and Solanki, S. C., 1998. Studies on discrete rib roughened solar air heaters, In: *Proceedings of national solar energy convention*, 75-84.
69. Muluwork, K. B., 2000. Investigations on fluid flow and heat transfer in roughened absorber solar heaters, [PhD. Thesis] IIT Roorkee.
70. Ozisik, M. N., 1985. Heat transfer: A basic approach, McGraw Hill, Book Company, Singapore.
71. Paswan, M. K. and Sharma, S. P., 2009. Thermal performance of wire- mesh roughened solar air heaters, *Arab Res. Inst. Sci. Engg.*, 1, 31-40.
72. Prasad, B. N. and Saini, J. S., 1988. Effect of artificial roughness on heat transfer and friction factor in a solar air heater, *Sol. Energy*, 41, 555-560.
73. Prasad BN, Kumar Ashwini and Singh K. D. P., 2015. Optimization of thermo hydraulic performance in three sides artificially roughened solar air heaters. *Sol. Energy*. 111, 313-319.
74. Prasad, B. N. and Saini, J.S., 1991. Optimal thermo-hydraulic performance of artificially roughened solar air heaters, *Sol. Energy*, 47, 91-96.
75. Prasad, B. N., 2013. Thermal performance of artificially roughened solar air heaters, *Sol. Energy*, 91, 59-67.
76. Prasad, B. N., Behura, K. Arun. and Prasad, L., 2014. Fluid flow and heat transfer analysis for heat transfer enhancement in three sided artificially roughened solar air heater, *Sol. Energy*, 105, 27-35.
77. Prasad, K. and Mullick, S.C., 1985. Heat transfer characteristics of a solar air heater used for drying purposes, *Appl. Energy* 13, 83-93.
78. Priyam, A. and Chand, P., 2016. Thermal and thermo hydraulic performance of wavy finned absorber solar air heater, *Sol. Energy*, 130, 250-259.
79. Promvong, P., Kwankaomeng, S. and Thianpong, C., 2011. Thermal behavior in solar air heater channel fitted with combined rib and delta winglet, *Int. Commun Heat Mass Transfer*, 38, 749-756.
80. Promvong, P., Jedsadaratanachai, W., Kwankaomeng, S. and Thianpong, C., 2012. 3D simulation of laminar flow and heat transfer in V-baffled square channel, *Int. Commun Heat Mass Transfer*, 39, 85-93.
81. Promvong, P., Stripattanapipat, S. and Kwankaomeng, S., 2010. Laminar periodic flow and heat transfer in square channel with 450 in-line baffles on two opposite walls, *Int. J. Therm. Sci.*, 49, 963-975.



## Global Journal of Engineering Science and Research Management

82. Reddy, T.A. and Gupta, C.L., 1980. Generating application design data for solar air heating system, *Sol. Energy*, 25, 527-530.
83. Saha, S.K. and Mahanta, D.K., 2001. Thermodynamic optimization of solar flat-plate collector, *Renew. Energy*, 23, 181-193.
84. Sahu, M. M. and Bhagoria, J. L., 2005. Augmentation of heat transfer coefficient by using 900 broken transverse ribs on absorber plate of solar air heater, *Renew. Energy*, 30, 2063-2075.
85. Saini, R.P. and Saini, J.S., 1997. Heat transfer and friction factor correlations for artificially roughened duct with expanded metal mesh as roughness element, *Int. journal of Heat Mass Trans.* 40, 973-986.
86. Sheriff, N and Gumley, P., 1966. Heat transfer and friction properties of surfaces with discrete roughness, *Int. J. Heat Mass Trans.* 9, 1297-1320.
87. Sharma, A. K. and Thakur, N. S., 2012. CFD based fluid flow and heat transfer analysis of a V-shaped roughened surface solar air heater, *Int. J. Engg. Sci. Technol.*, 4 (5), 2115-2121.
88. Sharma, S. K. and Kalamkar, V. R., 2015. Thermo-hydraulic performance analysis of solar air heaters having artificial roughness—A review, *Renewable and sustainable energy reviews.*, 41, 413-435.
89. Shewen, E.C. and Hollands, K.G.T., March-1980. Development of a fixed position, fixed configuration air heating solar collector, National Research council of Canada.
90. Shewen, E.C. and Hollands, K.G.T., 1978. Optimization of flow passage geometry in solar air heaters, Paper 1-1-2, *Proc. of Solar Energy Society of Canada, Inc. London.*
91. Siddhartha., Sharma, N. and Varun., 2012. A practical swarm optimization algorithm for optimization of thermal performance of a smooth flat plate solar air heater, 38, 406-413.
92. Sriromrein, P. and Promvong, P., 2-4 June, 2010. Augmented heat transfer in rectangular duct with angled Z-shaped ribs, In: *Proceedings of the International Conference on energy and sustainable development, Thailand.*
93. Sukhatme, S.P. and Nayak, J.K., 2008. *Solar Energy, Principles of Thermal Collection and Storage*, Tata McGraw Hill, New Delhi
94. Varun, Saini, R. P. and Singal, S. K., 2008. Investigation of thermal performance of solar air heater having roughness elements as a combination of inclined and transverse ribs on the absorber plate, *Renew. Energy*, 33, 1398-1405.
95. Verma, R., Chandra, R. and Garg, H. P., 1991. A technical note on optimization of solar air heaters of different designs, *Renew. Energy*, 2, (4/5), 521-531.
96. Verma, S.K. and Prasad, B.N., 2000. Investigation for the optimal thermo hydraulic performance of artificially roughened solar air heaters, *Renew. Energy*, 20, 19-36.
97. Webb, R.L., Eckert, E.R.G and Goldstein, R.J., 1971. Heat transfer and friction in tubes with repeated-rib roughness, *Int. J. of Heat and Mass Trans.* 14, 601-617.
98. Webb, R. L. and Eckert, E. R. G., 1971. Application of rough surfaces to heat exchanger design, *Int. J. Heat Mass Trans.* 15, 1647-1658.
99. Yadav, S., Maneesh Kausal, Varun and Siddhartha., 2012. Nusselt number and friction factor correlations for solar air heater duct having protrusions as roughness elements on absorber.
100. Yadav, A. S. and Bhagoria, J. L., 2013a. Modeling and simulation of turbulent flows through a solar air heater having square-sectioned transverse rib roughness on the absorber plate, *Sci. world, J.*
101. Yadav, A. S. and Bhagoria, J. L., 2013b. Numerical investigation of flow through an artificially roughened solar heater, *Int. J. Ambient Energy.*
102. Yadav, A. S. and Bhagoria, J. L., 2013c. A CFD Based heat transfer and fluid flow analysis of a solar air heater provided with circular transverse wire rib roughness on the absorber plate, *Energy*, 55, 1127-1142.
103. Yadav, A. S. and Bhagoria, J.L., 2014. A CFD based thermo hydraulic performance analysis of an artificially roughened solar air heater having equilateral triangular sectioned rib roughness on the absorber plate, *Int. J. Heat Mass Trans.* 70, 1016-1039.