



ANALYSIS THE SURFACE RECONSTRUCTION SYSTEM FROM SCATTERED CLOUD POINTS

Neetu Jangra^{*1}, Pardeep Saini²

^{*1} M. Tech., Deptt E.C.E., Maharishi Dayanand University, Rohtak. (H.R.).

² Astt, Prof. Deptt E.C.E., Maharishi Dayanand University, Rohtak. (H.R.).

*Correspondence Author: neetusha.90@gmail.com

Keywords: Crust algorithm, Delaunay algorithm, Surface Reconstruction, Cloud Points.

Abstract

In this paper we have studied the Delaunay algorithm and Crust algorithm. We compare this algorithm for the time taken for the surface reconstruction. The goal of surface reconstruction is to find a surface from a given finite set of geometric sample values.

Introduction

In many applications, the sample values are points. But other types of samples, like curves occurring e.g. in tactile sampling by an adapted milling machine, or volume densities occurring for instance in X-ray based computer tomography, are also possible. Reverse engineering of geometric shapes is the process of converting a large number of measured data points into a concise and consistent computer representation. In this sense, it is the inverse of the traditional CAD/CAM procedures, which create physical objects from CAD models. Triangulating scattered point-sets is a very important problem of reverse engineering. Given a set of unorganized points that lie approximately on the boundary surface of a three-dimensional object, and without a priori information on the topology, our goal is to reconstruct the surface by building a triangular mesh using the given points as vertices. The resulting polyhedron can be the input of further procedures like surface fitting, or can be visualized with various textures. (For example, in computer-animated films the characters are often created as clay models first, and then the 3D scanned and triangulated models are used for visualization. All algorithms aiming to solve this problem must overcome several difficulties. The first one is related to the size and quality of the input. Modern 3D scanners make it possible to acquire several (ten) millions of sample points on the object's surface. Algorithms for reconstructing surfaces from large data have been proposed in the past. These algorithms avoid three dimensional Delaunay triangulations and can do so by using special information such as surface normal's that come with the input or by exploiting properties of the data like uniformity.

Crust algorithm

The Crust Algorithm is a new algorithm for the reconstruction of surfaces of arbitrary topology from unorganized sample points in 3d. The algorithm is the first one for this problem with provable guarantees. Given a "good sample" from a smooth surface, the output is guaranteed to be topologically correct and convergent to the original surface as the sampling density increases. The definition of a good sample is itself interesting: the required sampling density varies locally, rigorously capturing the intuitive notion that featureless areas can be reconstructed from fewer samples.

Delaunay algorithm

Voronoi diagrams and Delaunay triangulations are important geometric data structures that are built on the notion of "nearness." Many differential properties of curves and surfaces are defined on local neighborhoods. Voronoi diagrams and their duals, Delaunay triangulations, provide a tool to approximate these neighborhoods in the discrete domain. They are defined for a point set in any Euclidean space. We define them in two dimensions and mention the extensions to three dimensions since the curve and surface




reconstruction algorithms as dealt in this book are concerned with these two Euclidean spaces. Before the definitions we state a non-degeneracy condition for the point set P defining the Voronoi and Delaunay diagrams. This non degeneracy condition not only makes the definitions less complicated but also makes the algorithms avoid special cases. At a Voronoi vertex which is equidistant from four points in P . Three Voronoi cells meet at a Voronoi edge, and two Voronoi cells meet at a Voronoi facet. The vertices are dual to the Voronoi cells, the Delaunay edges are dual to the Voronoi facets, and the Delaunay triangles are dual to the Voronoi edges.

Simulation results

This section represents the optimization of surface reconstruction system from scattered cloud points. The graph below shows the trace for the Delaunay algorithm.

Added Shield: 0.0097 s, Triangulation Time: 3.3673 s, Connectivity Time: 1.5157 s, Circumcenters Tetraedroms Time: 0.1685 s, Intersection factor Time: 0.1191 s, Walking Time: 9.2955 s, Total Time using Delaunay: 14.5000 s. Added Shield: 0.0086 s, Triangulation Time: 3.1603 s, Connectivity Time: 0.8623 s, Circumcenters Tetraedroms Time: 0.1568 s, Walking Time: 0.7339 s, Total Time using Crust: 4.9540 s. The output using Crust algorithm.

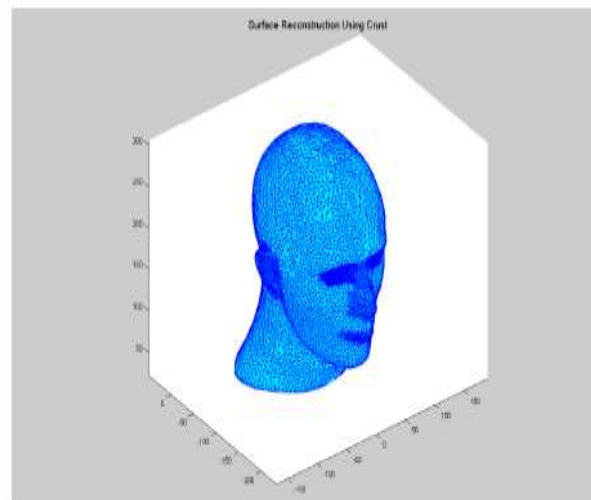

*Fig3. Crust algorithm
The output using Delaunay algorithm*

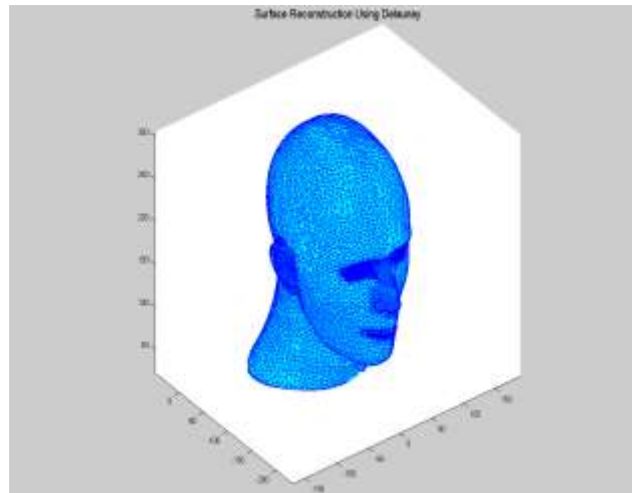


Fig4. Delaunay algorithm

Conclusion

This paper presents the optimization of surface reconstruction system from scattered cloud points. The results of the simulation are in the form of graphs of time taken to complete surface reconstruction v/s the number of cloud points.

References

1. Guan, Yudong; Li, Yan; Wang, Ying; Zhang, Hong, *Intelligent Systems and Applications, 2009. ISA 2009. International Workshop on*, vol., no. 23-24 May 2009 pp.1-4.
2. Sheng, Luo; li-qu, Lin; Xiao-main, Chen, "A New Mesh Growing Surface Reconstruction Algorithm," *Education Technology and Computer Science, 2009. ETCS '09. First International Workshop on*, 7-8 March 2009. vol.3, no., pp.889-893
3. Zhan Zongqian; Zhang Xiaoqian, "3D surface reconstruction and panorama stitching based on LCD-based calibration and multi-baselines stereo matching," *Image Analysis and Signal Processing, 2009. IASP 2009. International Conference on*, 11-12 April 2009, vol, no., pp.278-281.
4. Reuter, P.; Joyot, P.; Trunzler, J.; Boubekeur, T.; Schlick, C., "Surface reconstruction with enriched reproducing kernel particle approximation," *Point-Based Graphics, 2005.Eurographics/IEEE VGTC Symposium Proceedings, 20-21 June 2005*, vol., no., pp. 79-87.
5. Bilir, S.C.; Yemez, Y., "Time varying surface reconstruction from multiview video," *Shape Modeling and Applications, 2008. SMI 2008. IEEE International Conference on June 2008*, vol.,no., pp.47-51, 4-6 .
6. Xinrong Hu; Naixue Xiong; Yang, L.T.; Dehua Li, "A Surface Reconstruction Approach with a Rotated Camera," *Computer Science and its Applications, 2008. CSA '08. International Symposium on Oct. 2008*, vol., no., pp.72-77, 13-15.

